



US008783075B2

(12) **United States Patent**
Matre

(10) **Patent No.:** **US 8,783,075 B2**
(45) **Date of Patent:** **Jul. 22, 2014**

- (54) **LATCH ASSEMBLY**
- (75) Inventor: **Daniel A. Matre**, Brookfield, WI (US)
- (73) Assignee: **Matre Group, LLC.**, Brookfield, WI (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 191 days.

5,884,948	A	3/1999	Weinerman et al.
6,419,286	B1	7/2002	Szablewski
6,471,260	B1	10/2002	Weinerman et al.
6,513,353	B1	2/2003	Weinerman et al.
6,651,467	B1	11/2003	Weinerman et al.
6,695,362	B2	2/2004	Kluting et al.
6,705,178	B1*	3/2004	Grandjean 74/502.4
6,708,537	B1*	3/2004	Eschweiler et al. 70/208
6,942,259	B2*	9/2005	Marzolf et al. 292/216
7,267,377	B2*	9/2007	Marzolf et al. 292/25
7,267,380	B2	9/2007	Bullock et al.
7,513,541	B1	4/2009	Gregory
7,726,707	B2	6/2010	Simchayoff et al.
2004/0140678	A1	7/2004	Linares
2006/0006668	A1*	1/2006	Hidding et al. 292/216
2008/0217929	A1*	9/2008	Zweibohmer 292/216

(21) Appl. No.: **13/443,334**

(22) Filed: **Apr. 10, 2012**

(65) **Prior Publication Data**
US 2012/0260700 A1 Oct. 18, 2012

Related U.S. Application Data
(60) Provisional application No. 61/474,587, filed on Apr. 12, 2011.

- (51) **Int. Cl.**
B60R 25/02 (2013.01)
- (52) **U.S. Cl.**
USPC **70/208**; 292/216; 292/DIG. 23; 292/DIG. 31
- (58) **Field of Classification Search**
USPC 70/208; 292/216, DIG. 23, DIG. 31
See application file for complete search history.

(56) **References Cited**
U.S. PATENT DOCUMENTS

4,082,353	A	4/1978	Hollowell
4,703,961	A	11/1987	Weinerman et al.
5,299,844	A	4/1994	Gleason
5,564,295	A	10/1996	Weinerman et al.
5,586,458	A	12/1996	Weinerman et al.

OTHER PUBLICATIONS

Documents from Southco, www.southco.com, Jan. 25, 2005.


* cited by examiner

Primary Examiner — Suzanne Barrett
(74) *Attorney, Agent, or Firm* — Boyle Fredrickson, S.C.

(57) **ABSTRACT**

The present disclosure is directed to a latch assembly that includes a pawl assembly, a lever assembly and a lock assembly. The pawl assembly is actuated from an open position to a closed assembly by the lever assembly. The lever assembly includes a drive lever having a slot and a driven lever having a slot that is open on one end. The lock assembly has an engagement member that moves along the slot of the drive lever between an engaged position and a disengaged position. When in the engaged position, the engagement member is received within the slot of the driven lever. When in the disengaged position, the engagement member is outside of the slot of the driven lever.

19 Claims, 15 Drawing Sheets

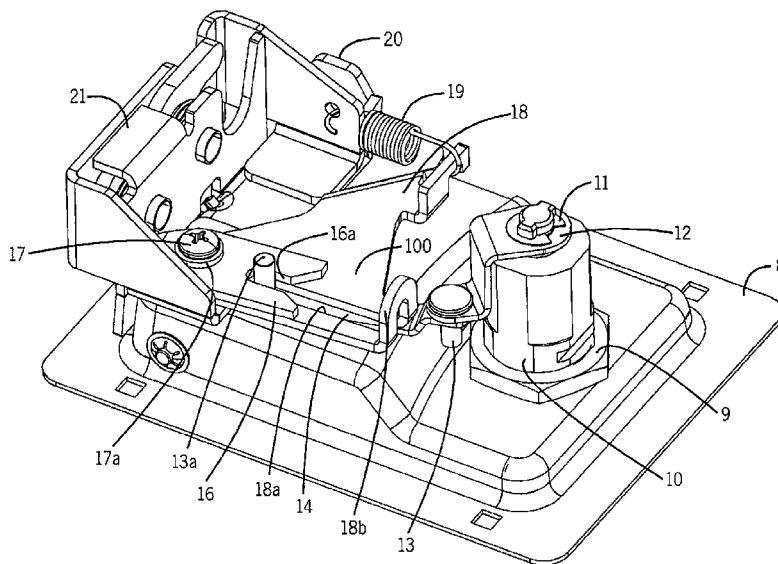

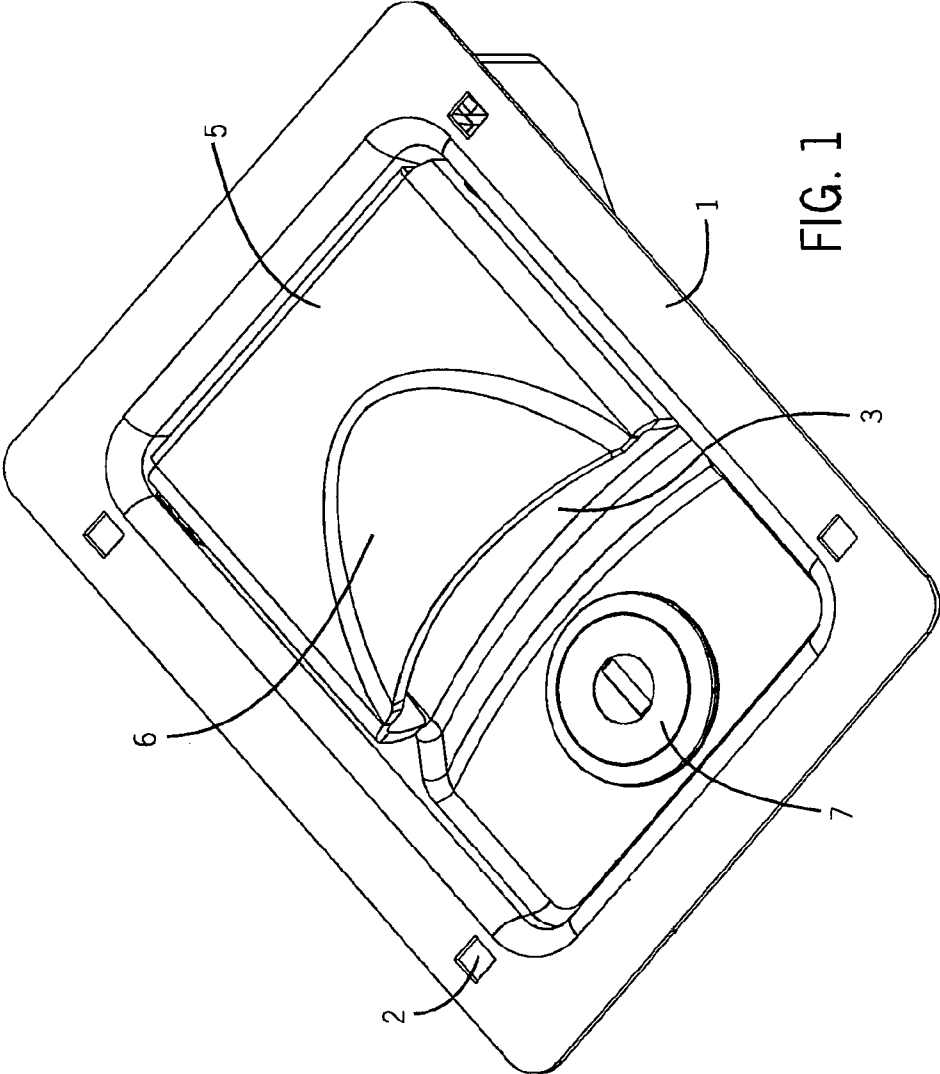
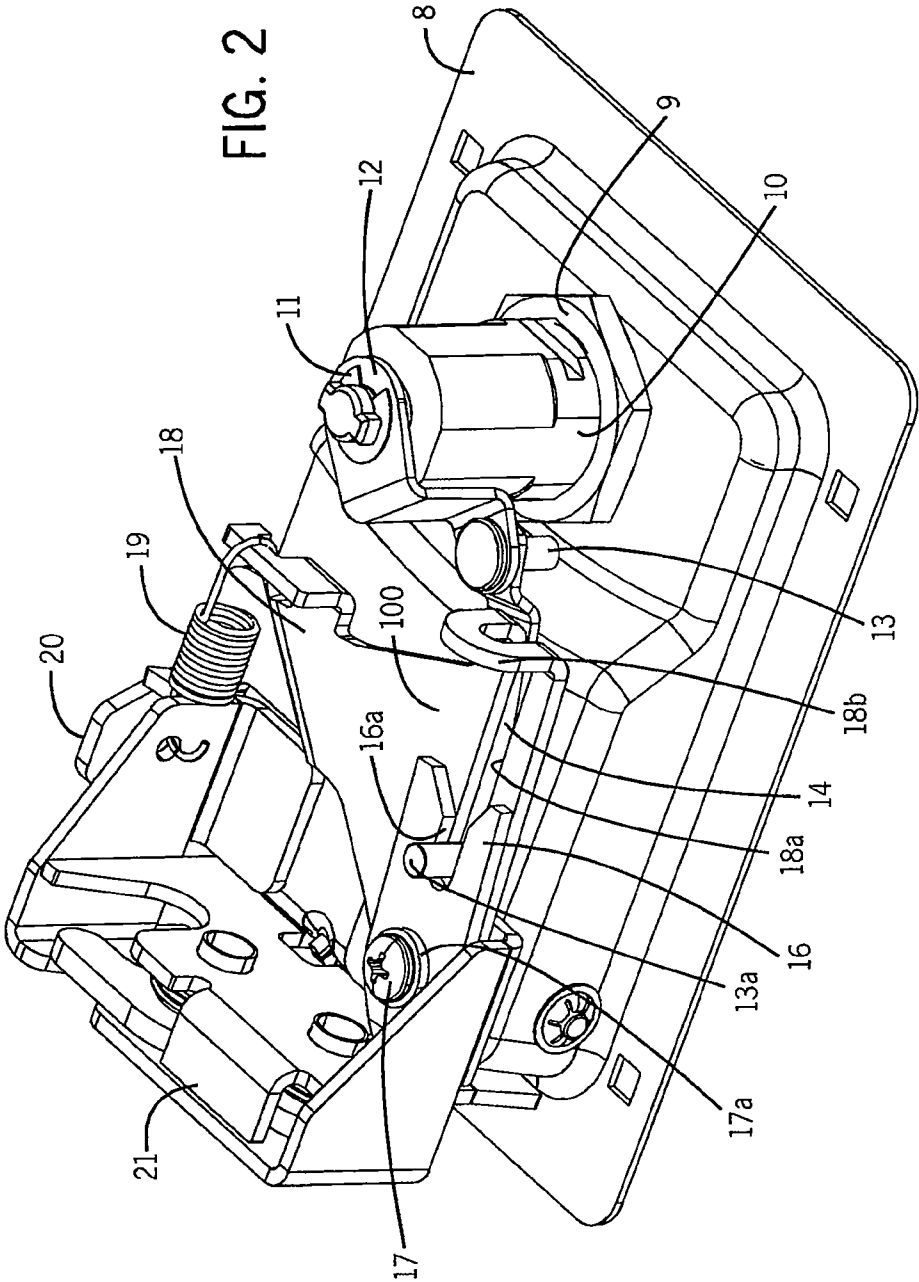
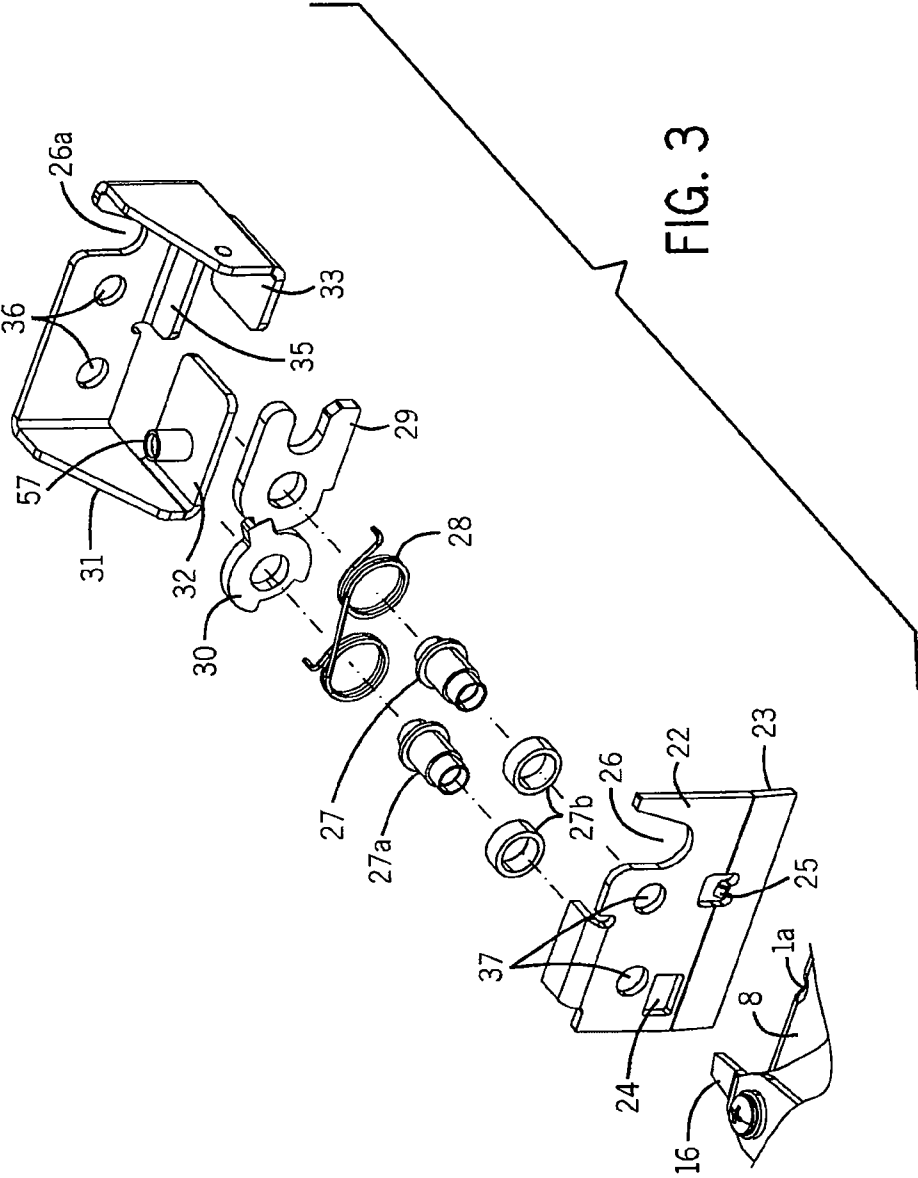
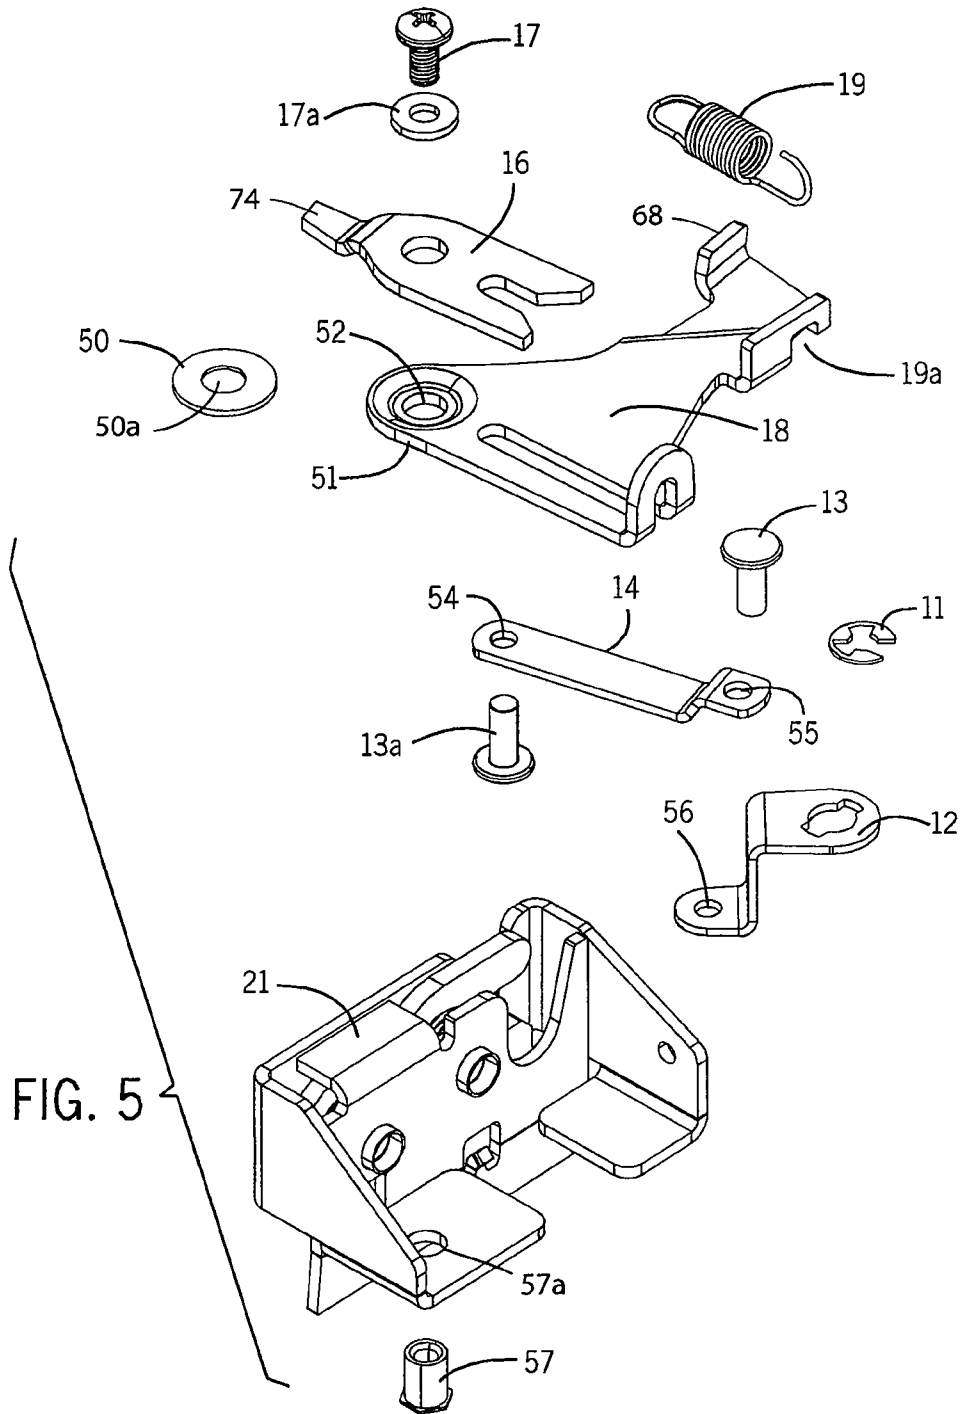
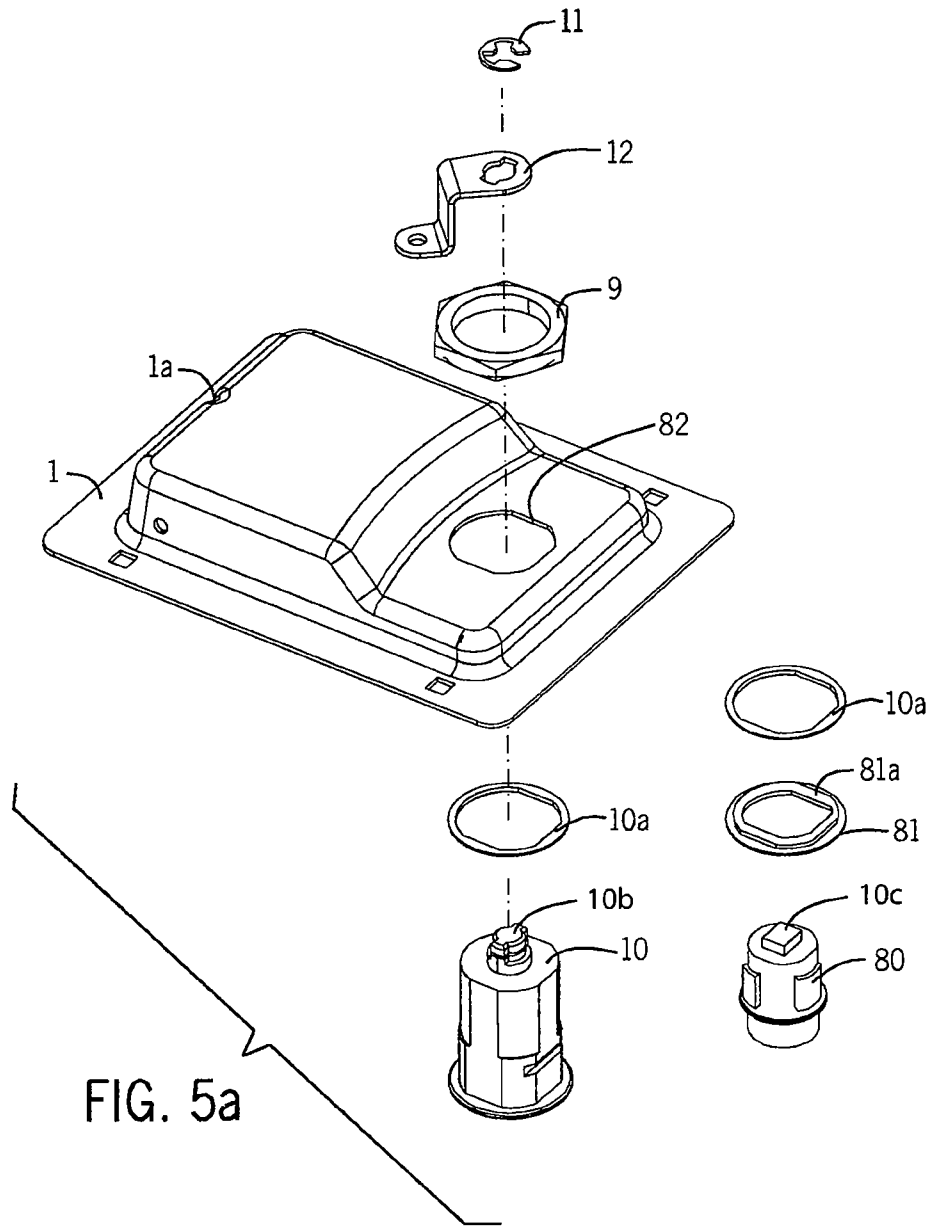



FIG. 1









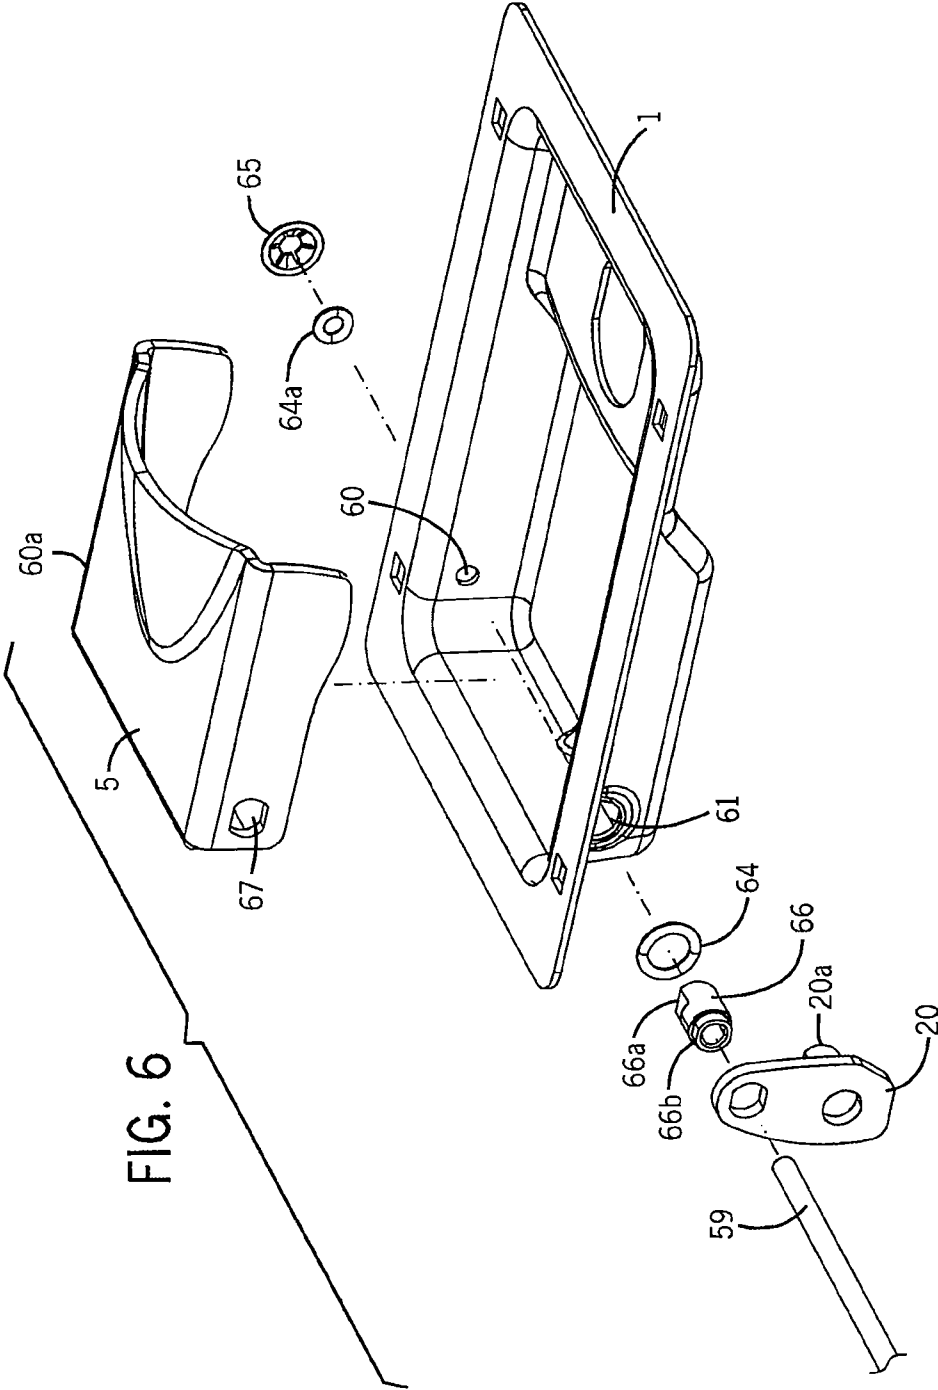

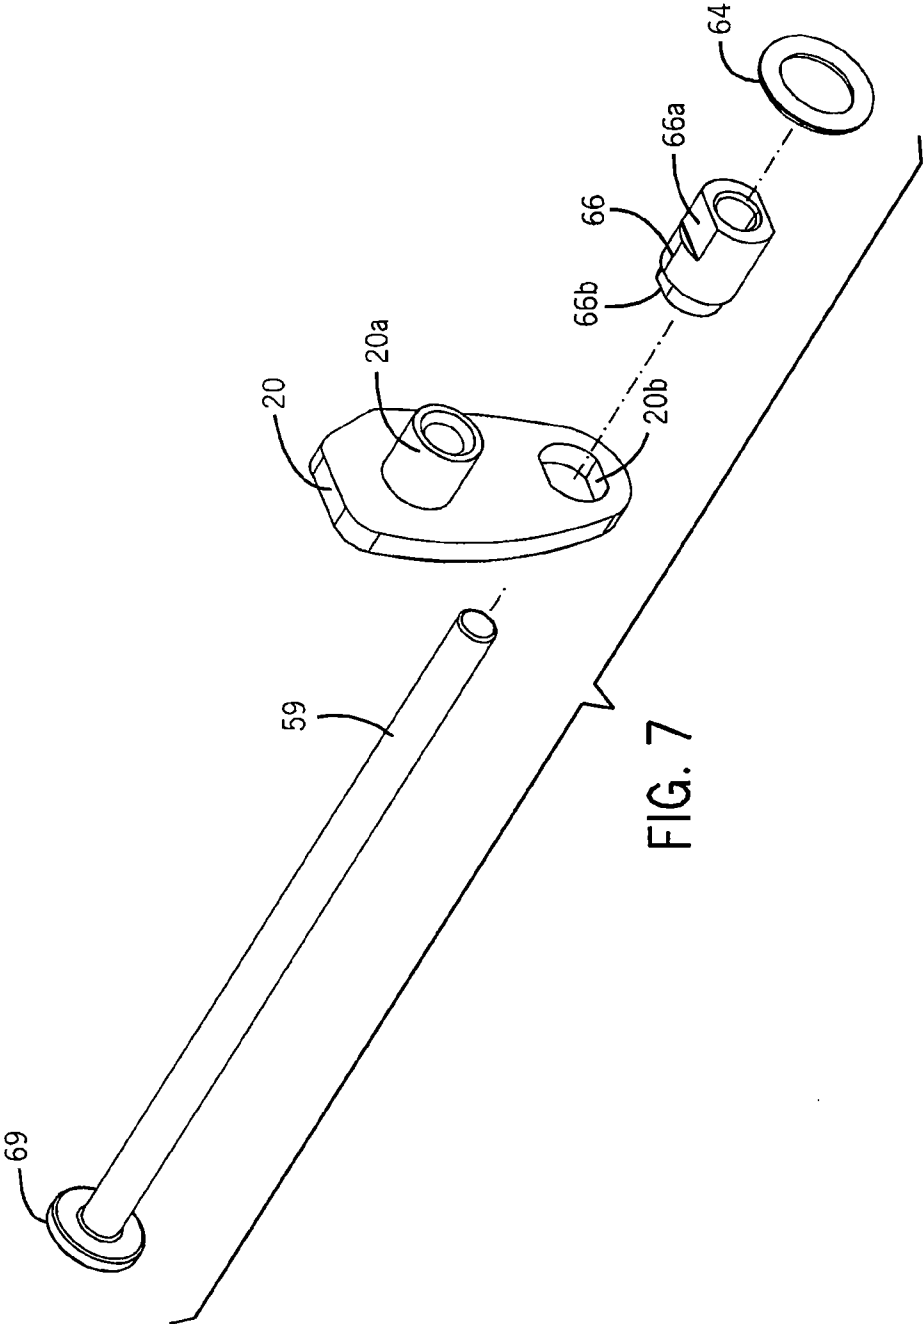


FIG. 7

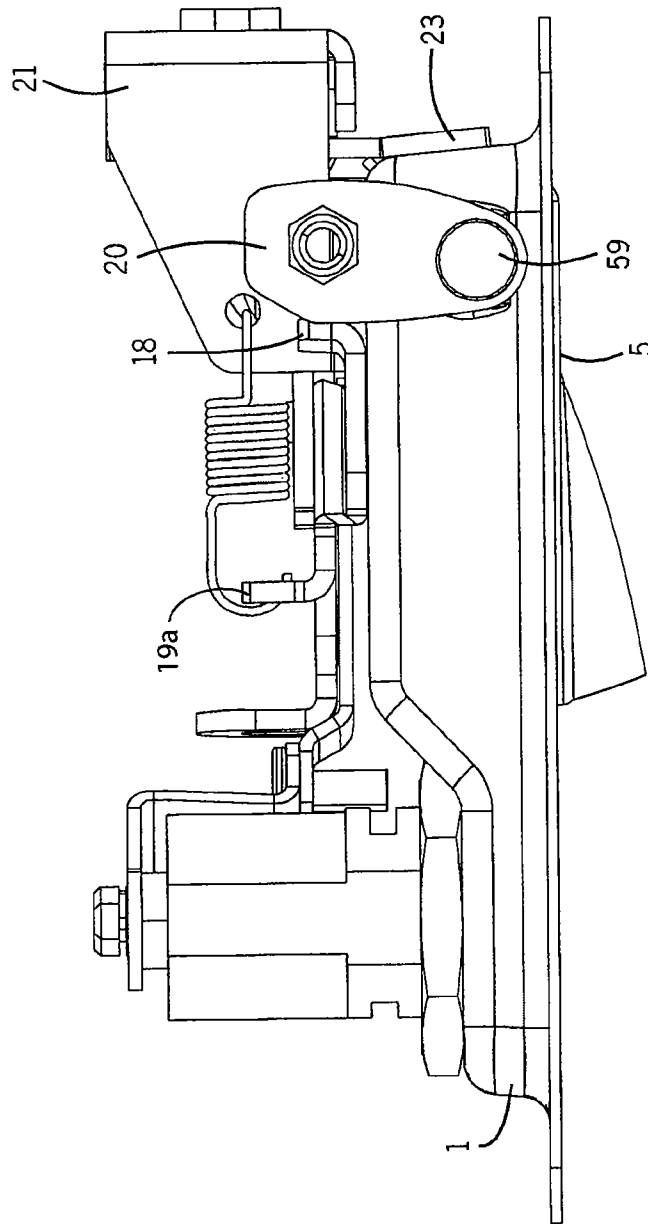


FIG. 8

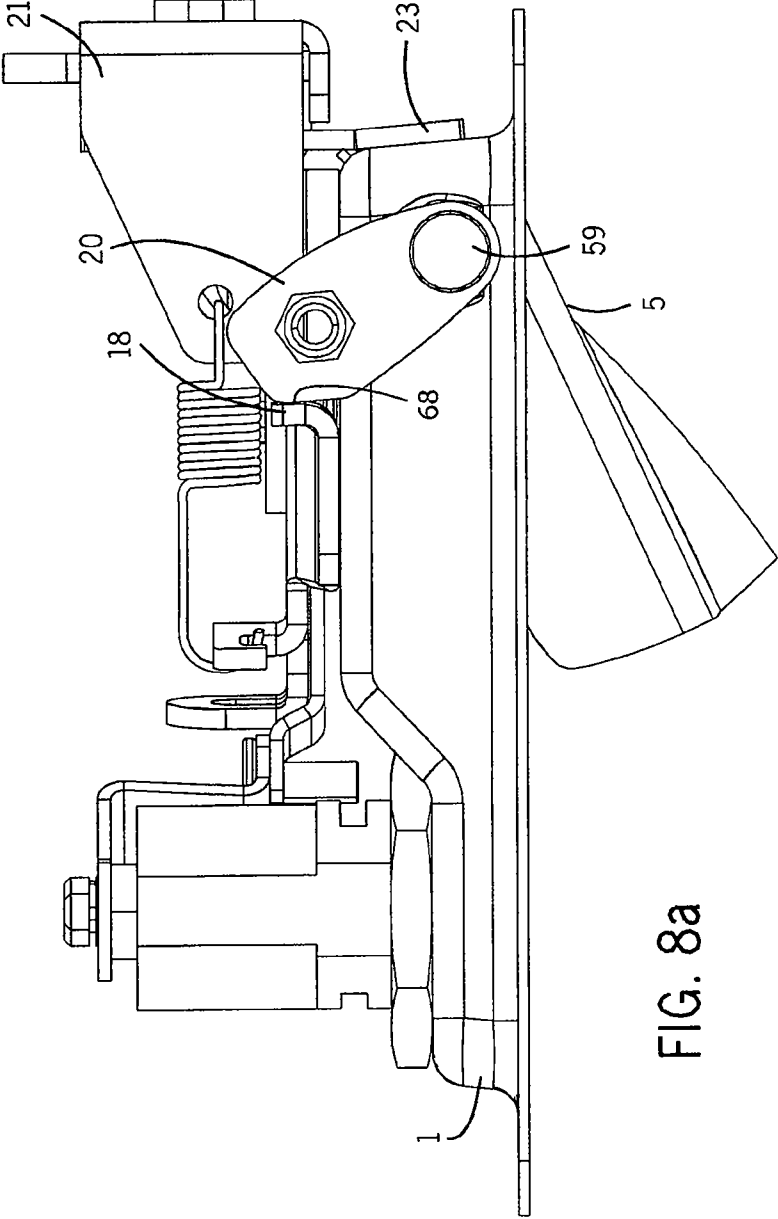
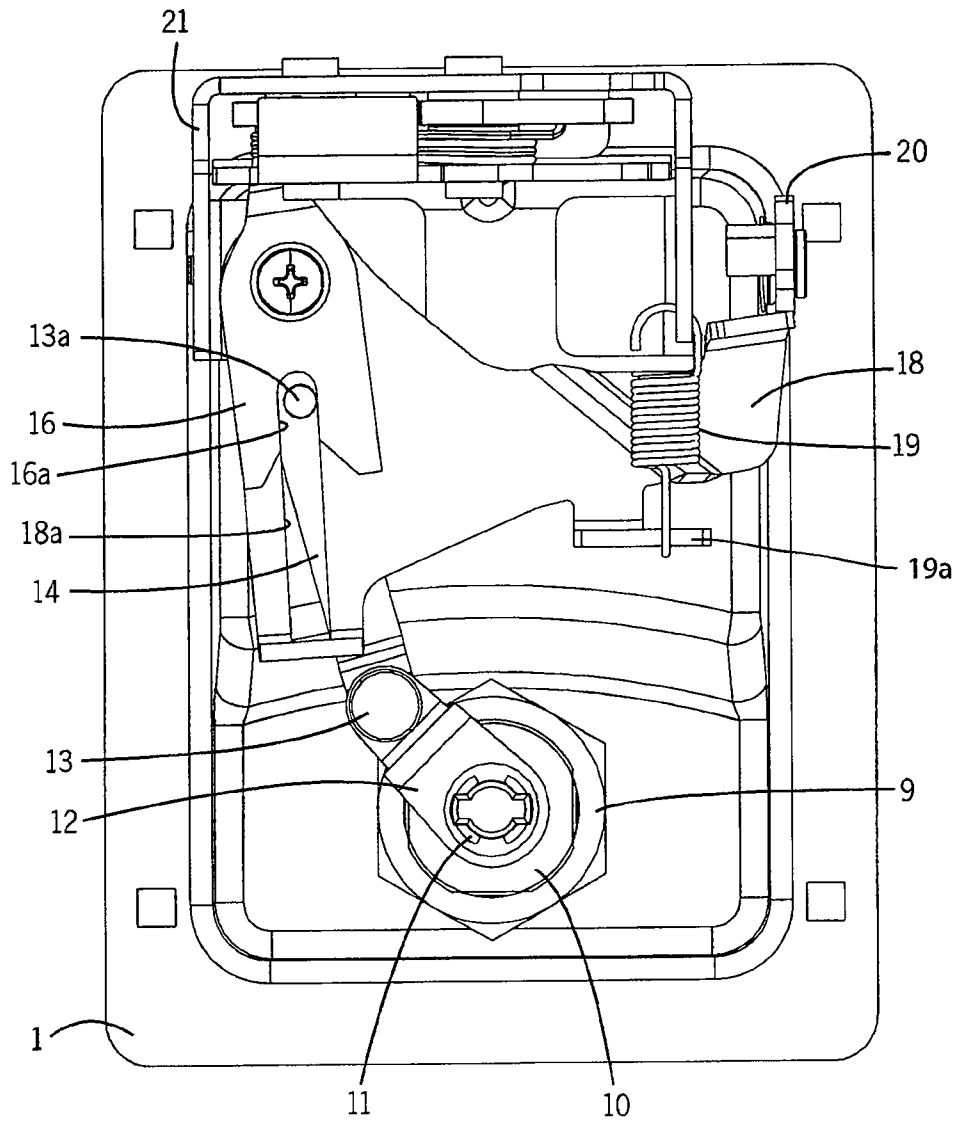


FIG. 8a



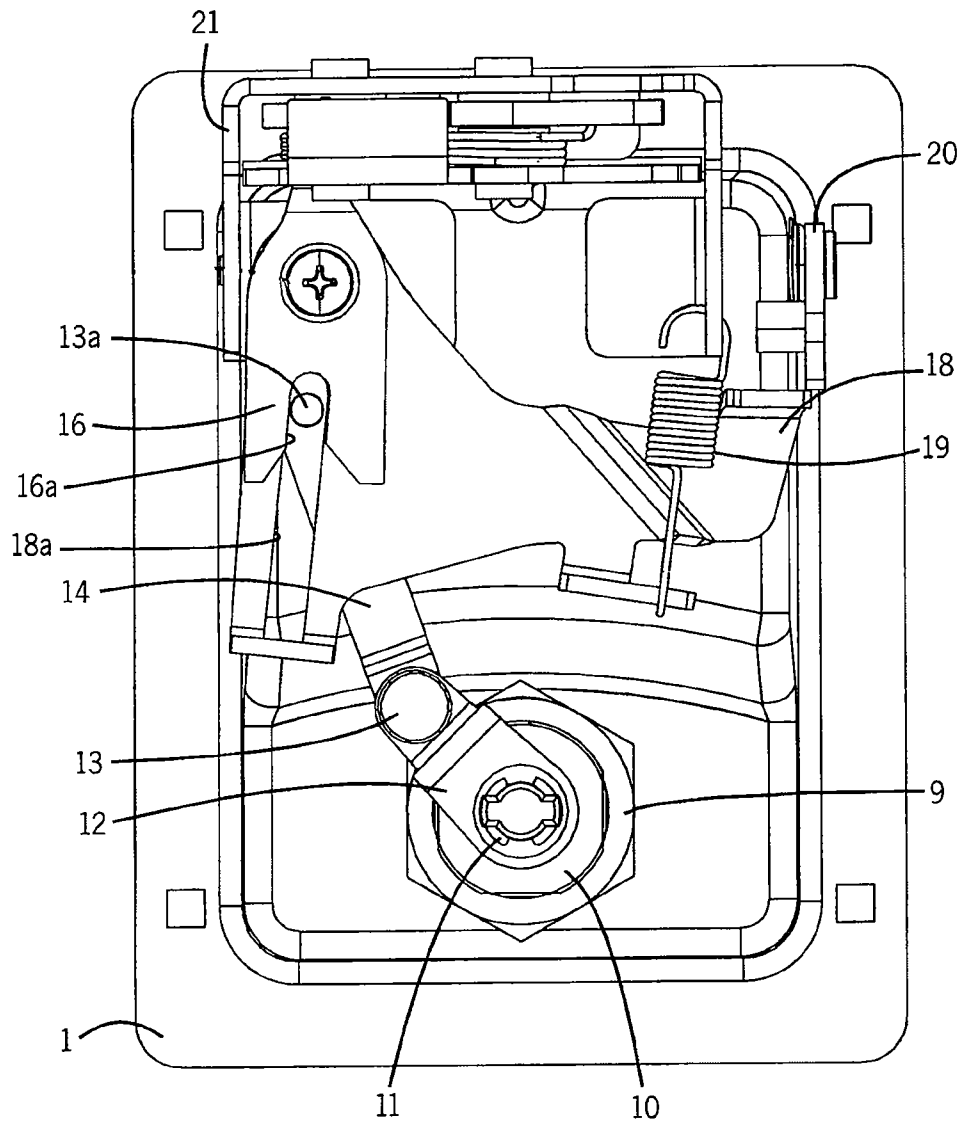
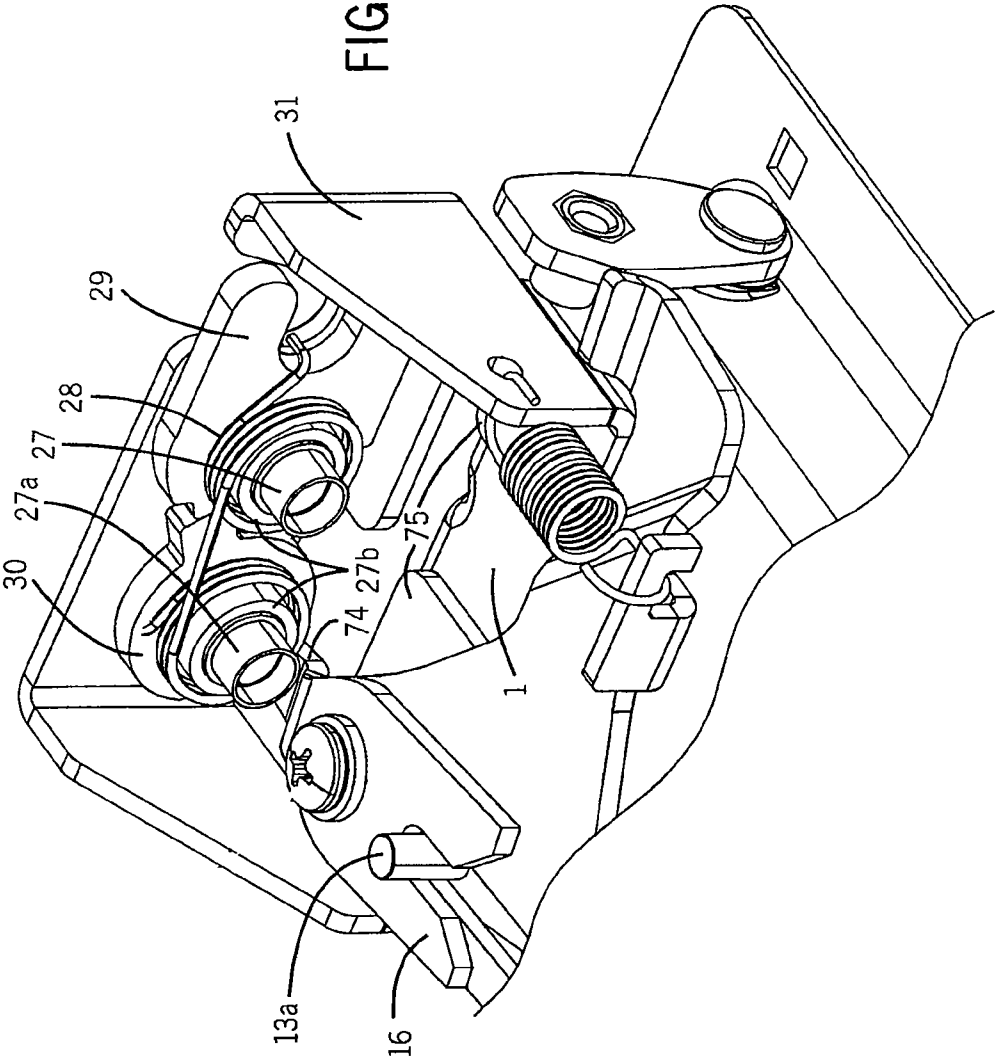


FIG. 10




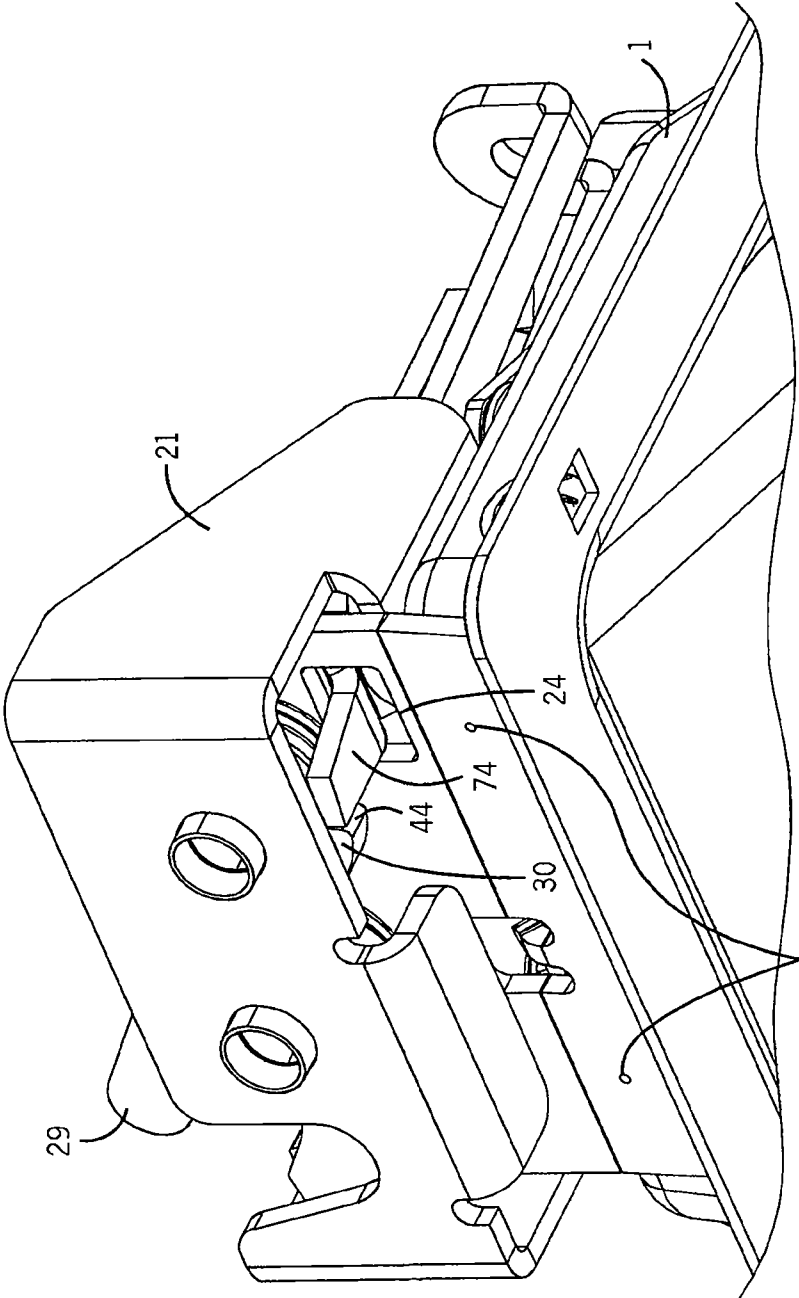


FIG. 11

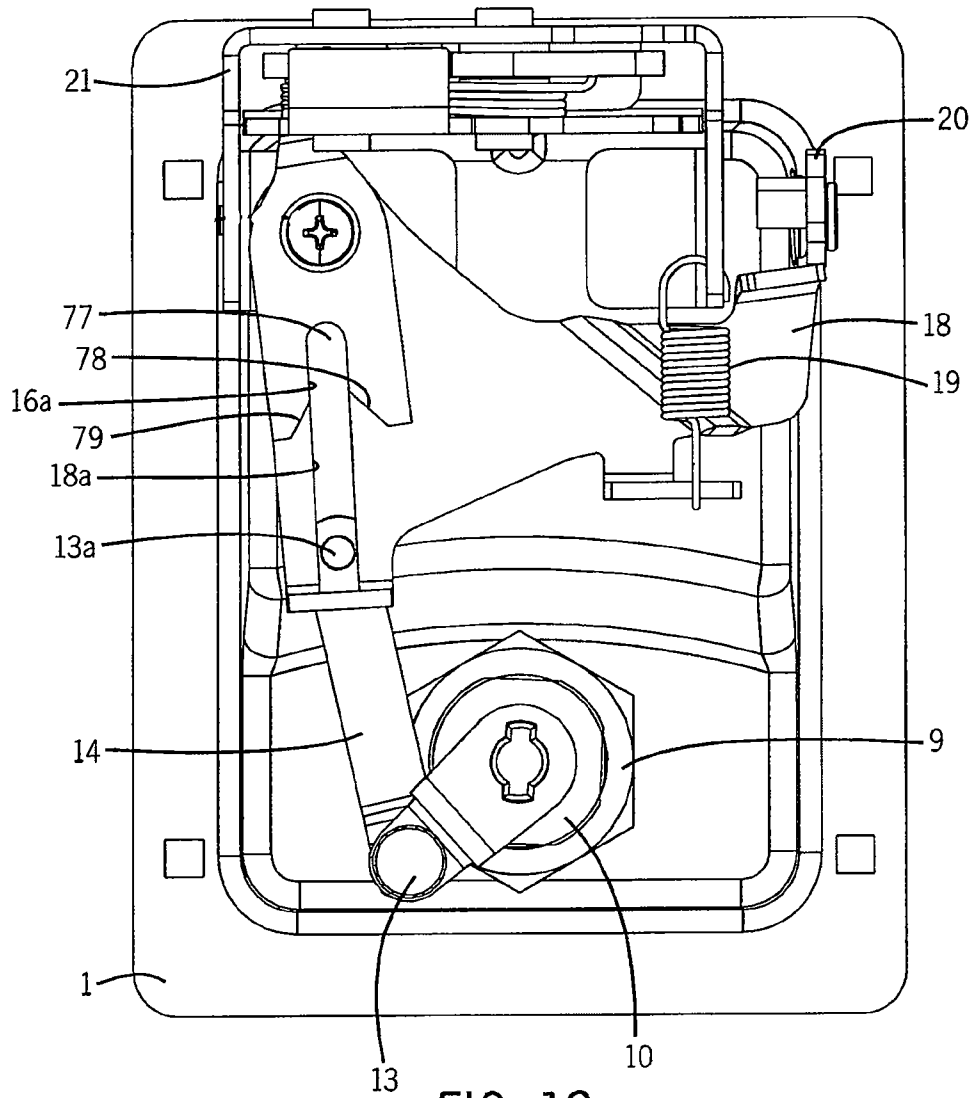

1

LATCH ASSEMBLY

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims priority under 35 U.S.C. §119(e) to U.S. Provisional Application Ser. No. 61/474,587 filed Apr. 12, 2012 and entitled "Latch Assembly," the entire contents of which are hereby expressly incorporated by reference into the present application.

BACKGROUND OF THE INVENTION

The present invention relates generally to a latch assembly used to releasably secure a door. Generally speaking, the latch assembly includes various subassemblies including a pawl assembly, a lever assembly, and a lock assembly. These subassemblies cooperate during operation of the lock. For example, when a user closes the door the pawl assembly receives and secures a strike, thus securing the door in place. In order to open the door, the pawl assembly must be actuated so as to release the strike. First, a user unlocks the door by actuating the lock assembly, e.g., with a key. When unlocked, the user then pulls the handle, which in turn actuates the lever assembly. The lever assembly actuates the pawl assembly to release the strike, which enables the user to open the door. When in the locked position, the lock assembly prevents the lever assembly from actuating the pawl the assembly.

SUMMARY OF THE INVENTION

The present invention is directed to a latch assembly that may be integrated into a door, such as a door on a vehicle. In one embodiment, the latch assembly includes a pawl assembly having an open position and a closed position. The pawl assembly is actuated from the open to the closed assembly by a lever assembly that includes a drive lever having a slot and a driven lever having a slot that is open on one end. The latch assembly further includes a lock assembly having an engagement member that moves along the slot of the drive lever between an engaged position and a disengaged position. When in the engaged position, the engagement member is received within the slot of the driven lever. When in the disengaged position, the engagement member is outside of the slot of the driven lever.

In another embodiment, the latch assembly includes a housing and a lever assembly supported by the housing. The lever assembly includes a drive lever having a slot and a driven lever having a slot. The drive lever drives the driven lever when an engagement member is positioned within the slot of the driven lever. The lever assembly further includes a cam lever that actuates the drive lever. The cam lever is positioned on one side of the housing and does not extend through the housing.

In another embodiment, the latch assembly includes a housing and a handle that is rotatably attached to the housing by an axle. There is a pawl assembly supported by the housing. The pawl assembly has an open position and a closed position. A lever assembly actuates the pawl assembly from the closed position to the open position. The lever assembly is supported by the housing and includes a drive lever having a slot, a driven lever having a slot that is open on one end; and a cam lever that actuates the drive lever. The cam lever is secured to a collar that rotates about the axle, and which causes the cam lever to rotate. The cam lever is positioned on one side of the housing and does not extend through the housing. The latch assembly further includes a lock assembly

2

having an engagement member that moves along the slot of the drive lever between an engaged position and a disengaged position. When in the engaged position, the engagement member is received within the slot of the driven lever. When in the disengaged position, the engagement member is outside of the slot of the driven lever. The drive lever drives the driven lever only when the engagement member is in the engaged position.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated in the accompanying drawings in which like reference numerals represent like parts throughout.

In the drawings:

FIG. 1 is an isometric view of one embodiment of the latch assembly of the present invention;

FIG. 2 is an isometric view of the latch assembly of FIG. 1 with the rear cover removed;

FIG. 3 is an exploded view of a pawl assembly that is incorporated into the latch assembly of FIG. 1;

FIG. 4a is an elevation view of the pawl assembly of FIG. 3 in a closed position;

FIG. 4b is an elevation view of the pawl assembly of FIG. 3 in an intermediate position;

FIG. 4c is an elevation view of the pawl assembly of FIG. 3 in an opened position;

FIG. 5 is an exploded view of a lever assembly that is incorporated into the latch assembly of FIG. 1;

FIG. 5a is an exploded view of a lock assembly that is incorporated in to the latch assembly of FIG. 1;

FIG. 6 an exploded view of the latch assembly of FIG. 1;

FIG. 7 is an isometric view of a cam lever incorporated into the latch assembly of FIG. 1;

FIG. 8 is a side elevation view of the latch assembly of FIG. 1 in an unactuated position;

FIG. 8a is a side elevation view of the latch assembly of FIG. 1 in an actuated position;

FIG. 9 is an elevational view of the latch assembly of FIG. 1 in an unlocked, unactuated position;

FIG. 9a is an elevational view of the latch assembly of FIG. 1 in an unlocked, actuated position;

FIG. 10 is a partial, enlarged isometric view of the pawl assembly and lever assembly of the latch assembly of FIG. 1;

FIG. 11 is another partial, enlarged isometric view of the pawl assembly and lever assembly of the latch assembly of FIG. 1; and

FIG. 12 is another elevational view of the latch assembly of FIG. 1.

DETAILED DESCRIPTION

A latch assembly 8 is shown in FIGS. 1-12. Generally speaking, the latch assembly 8 includes three subassemblies—a lock assembly 7, a pawl assembly 21, and a lever assembly 100. The lock assembly 7 enables a user to lock and unlock the latch assembly 8. When the latch assembly 8 is in the locked position, the pawl assembly 21 cannot be actuated by the lever assembly 100. Conversely when the latch assembly 8 is in the unlocked position, the pawl assembly 21 can be actuated by the lever assembly 100. The interrelation of these subassemblies is discussed below.

With respect to the latch assembly 8, FIG. 1 shows a front side, e.g., the side that faces the user, of the latch assembly 8. The latch assembly 8 has a generally rectangular footprint, though this could be varied and/or resized as desired. The housing 1 includes a plurality of mounting holes 2 that are

3

used to secure the latch assembly **8** to a desired object. For example, in one embodiment, the latch assembly **8** may be secured to the door of a utility vehicle, where the latch assembly **8** enables a user to open, close and lock the door. Any type of suitable mechanical fastener, e.g., rivets, screws or a nut-bolt combination, may be received by the holes **2** and used to secure the latch assembly **8** to the desired object. Alternatively, the latch assembly **8** could be secured to an object via any other suitable means, such as welding or by using an adhesive of sufficient strength. The housing **1** includes a flat perimeter surface that is placed flush against the object, e.g., door, to which the latch assembly **8** is to be attached.

The latch assembly **8** further includes an actuating lever or handle **5** that enables a user to actuate the latch assembly **8**. The handle **5** may include a flange **6** that facilitates actuation of the lever **5**. During operation, the user inserts one or more fingers into a gap **3** between the handle **5** and the housing **1**. As shown in FIG. 1, the gap **3** is below the flange **6**. As shown in FIG. 1, the flange **6** is angled with respect to the main portion of the handle **5**. The user then pulls on the handle **5** in order to actuate the latch assembly **8**. The latch assembly **8** may further include a keyed lock assembly **7**, which allows a user to lock the latch assembly **8** using a key.

Lock Assembly

As shown in FIG. 2, the lock assembly **7** includes a nut **9**, a lock set **10**, a gasket **10a** and a clip **11** that facilitate the locking and unlocking of the latch assembly **8**. The clip **11** securing the lever **12** to the protrusions **10b** and **10c** could also be accomplished by a threaded fastener. The lock set **10** includes a protrusion **10b**. A lever **12** engages the protrusion **10b** so that rotating the protrusion **10b** also rotates the lever **12**. As shown in FIG. 5a, the lock assembly may include an adaptor **81** so that a variable size, e.g., smaller, lock set **80** may be used with the lock assembly **7**. An adaptor **81** includes a faceted shoulder **81a** and faceted hole **82** on the housing **1** that, when using a key, prevents rotation of the lock set **80** resulting in rotation of the protrusion **10c**.

As shown in FIG. 12, for example, the lock assembly **7** may be centered along a longitudinal axis of the housing **1**. The lever **12** is operably connected, e.g., via pin **13**, with rod **14**. Rod **14** has an engagement member **13a**, e.g., a protrusion or a pin, that serves as a mechanical link between the drive lever **18** and driven lever **16** of the lever assembly **100**, which enables the lever assembly **100** to actuate the pawl assembly **21** when the latch assembly **8** is unlocked. The faceted hole **82** on housing **1** engages the facets on the lock set **10** that, when using a key, prevents rotation of the lock set **10** resulting in rotation of protrusion **10b**.

When the protrusion **13a** is positioned in a first position, e.g., when the protrusion is engaged with the driven lever **16**, the protrusion **13a** enables the driven lever **16** to be actuated by the drive lever **18**, which in turn actuates the pawl assembly **21**. This enables the user to open the latch assembly **8**. The protrusion **13a** is shown in the first position in FIG. 2.

When the protrusion **13a** is positioned in a second position, e.g., when the protrusion **13a** does not engage with the driven lever **16**, the lever assembly **100** cannot actuate the pawl assembly **21**. Accordingly, the user cannot open the latch assembly **8**, which remains closed. In other words, the user can pull on the handle **5**, but the latch assembly **8** will not permit the door to be opened because the driven lever **18** cannot actuate the pawl assembly **21**.

During operation, the lock assembly **7** moves the protrusion **13a** into either the first position, e.g., the unlocked position, or the second position, e.g., the locked position. As can

4

be understood in FIG. 2, the lever **12** is rotated, e.g., when the user inserts a key into the lock assembly **7** and turns the key. The rotation of lever **12** causes rod **14** to move between the first position and second position depending on the direction in which the lever **12** is rotated. For example, when the lever **12** is rotated in one direction (e.g., clockwise in the context of FIG. 2), the rod **14** and protrusion **13a** are pushed away from the lever **12** and into the first position, thus causing the protrusion **13a** to engage the driven lever **16**. When the lever **12** is rotated in the opposite direction (e.g., counterclockwise in the context of FIG. 2), the rod **14** and protrusion **13a** are pulled toward the lever **12** and into the second position, thus disengaging the protrusion **13a** from the driven lever **16**. Protrusion **13a** is press fitted into hole **54** of rod **14**. Pin **13** engages hole **55** of rod **14** simultaneously with hole **52** of lever **12** so as to allow a pivoting action between levers **14** and **12**.

As shown in FIGS. 2, 9 and 12, for example, the protrusion **13a** is received within and travels along a slot **18a** of the drive lever **18**. The slot **18a** guides the protrusion **13a** and mechanically links the drive lever **18** to the rod **14** of the lock assembly **7**. The slot **18a** of the driven lever **18** provides a linear path along which the protrusion **13a** travels. Thus, the protrusion **13a** travels along a linear path between the first position, i.e., the unlocked position, and the second position, i.e., the locked position.

The driven lever **16** has an open slot **16a** that receives the protrusion **13a** when the latch assembly **8** is unlocked. It is preferable to have an open slot **16a** on the driven lever **16** as opposed to a closed slot because an open slot **16a** allows for the protrusion **13a** to completely disengage from the driven lever **16** when the latch assembly is locked. In the embodiment shown, when the protrusion **13a** is in the second position, it is outside of the slot **18a**. Because the protrusion **13a**, and therefore the drive lever **18**, is completely disengaged from the driven lever **16** in the locked position, unwanted stresses and strains that would otherwise be placed on the driven lever **16** when the latch assembly **8** is actuated, e.g., a user pulls the handle **5**, in the locked position, can be reduced or eliminated. As shown in FIG. 12, the open slot **16a** of the driven lever **16** includes a pair of beveled edges **78**, **79** that help to guide the protrusion **13a** into the slot **16a** as the protrusion moves along the slot **18a** of the drive lever **18**. In other words, the edges **78**, **79** account for any play (or minor movement) the driven lever **16** may experience during normal operation of the latch assembly **8**.

Pawl Assembly

The pawl assembly **21** is shown in greater detail in FIGS. 3-5. As shown in FIG. 3, the pawl assembly includes an inner bracket **22** and an outer bracket **31** that combine to house the various components of the pawl assembly **21**, including the latch **29** and pawl **30**. The inner bracket **21**, which is proximate the housing **1** of the latch assembly **8**, includes a slot **24** that receives the driven lever **16**. The driven lever **16** extends through the slot **24** and engages the pawl **30**. The slot **24** is sized so as to enable sufficient movement of the lever **16** within the slot **24** so as to actuate the pawl assembly **21**.

The inner bracket **22** may further include an alignment member **25**, e.g., a protrusion, groove or ridge, that corresponds to a structural counterpart on the housing **1** of the latch assembly **8**. The alignment member **25** facilitates proper attachment of the pawl assembly **21** to the housing **1** of the latch assembly **8** when the latch assembly **8** is assembled during manufacture. For example, as shown in FIG. 11, the alignment member **25** of the pawl assembly **21** corresponds

5

with a detent in the housing **1** of the latch assembly **8**. Along these lines, the inner bracket **22** may further include an angled portion **23** that is angled so as to correspond with the draft angle of the mating surface of the housing **1** to which the angled portion **23** of the inner bracket **22** corresponds. See, e.g., FIGS. **8** and **8a**. This provides for a more proper alignment of the latch **29** with the strike **38**. The inner bracket angled portion **23** may be attached to housing **1**, e.g., via spot welds **76**.

The inner bracket **22** further includes a strike slot **26** that is sized to receive a strike **38**, which is a protrusion extending from the object to which the latch assembly **8** is attached. As shown in FIG. **4b**, the strike slot **26** has a beveled edge **41** that helps to guide the strike **38** into the strike slot **26**. By utilizing a beveled edge **41** as opposed to a rounded edge, the likelihood that strike **38** would be forced outside of the strike slot **26**, which may jam the latch assembly **8**, is reduced.

The inner bracket **22** further includes two axle holes **37** that receive axles **27a** and **27** that respectively support the latch **29** and pawl **30**. As shown in FIG. **3**, both the latch **29** and the pawl **30** have holes that receive the axles **27a** and **27** respectively. Thus, the latch **29** and pawl **30** rotate about the respective axles **27a** and **27** when the pawl assembly **21** is actuated. The axles **27** and **27a** also support a torsion spring **28**. The spacers **27b** support both coils of the torsion spring **28** and provide proper spacing between the outer bracket **31** and inner bracket **22**.

The outer bracket **31** similarly includes holes **36** that receive and support the axles **27** and **27a**, and a strike slot **26a** that is sized to receive the strike **38**. The outer bracket **31** has a flange **35** that extends inwardly with respect to the pawl assembly **21**. See FIG. **3**. The flange **35** prevents the latch **29** from over-rotating when the strike **38** rotates the latch **29** against the force of the spring **28**. Specifically, the bottom surface **43** of the latch **29** abuts the top surface of the flange **35** when the pawl assembly **21** is in the closed position, i.e., when the strike **38** is secured by the latch **29**. The outer bracket **31** includes a strike slot **26a** that is sized to receive the strike **38**.

The outer bracket **31** has a pivot flange **32** that cooperates with a common pivot **57**, e.g., a pin, to serve as a common pivot for the latch assembly **8** by supporting the driven lever **16**, the drive lever **18**, and other components of the lever assembly **100**. The outer bracket **31** may further include an additional flange **33** that may be used to attach the pawl assembly **21** to the housing **1**, e.g., via spot welds **75**.

FIGS. **4a-4c** illustrate the operation of the pawl assembly **21**. FIG. **4a** shows the pawl assembly **21** in a closed position. More specifically, as discussed above, the strike **38** has forced the latch **29** to rotate in the clockwise direction (in the context of FIG. **4a**) until the bottom surface **43** of the latch **29** contacts flange **35**, thus preventing further rotation of the latch **29** in the clockwise direction. The strike **38** is secured within the strike slot **26a** and causes the spring **28** to be in tension. Accordingly, the spring **28** biases the latch **29** in a counterclockwise direction. As shown in FIG. **4a**, an end of the torsion spring **28** engages a notch **40** in the latch **29** to apply a force to the latch **29**. The bevel **41** on the latch **29** assists the clockwise rotation of latch **29** when receiving the strike **38** into the latch slot **42**.

When the pawl assembly **21** is in the closed position of FIG. **4a**, the pawl **30** is biased in a clockwise direction by the spring **28**. Specifically, the other end of the spring **28**, i.e., the end opposite the end that is engaged with the latch **29**, similarly engages a notch **39** in the pawl **30**. Thus, the pawl **30** is biased in a clockwise direction (in the context of FIG. **4a**).

6

When in the closed position, a protrusion **45** of the pawl **30** engages a first catch **47** in the latch **49**, as shown in FIG. **4a**. Thus, further rotation of the latch **29** in the counterclockwise direction is prevented by the interaction of the first catch **47** and the protrusion **45** of the pawl **30**. The catch **47** is sized so as to create a gap between the catch **47** and the protrusion **45**, which facilitates rotation of the latch **29** and the pawl **30** when the pawl **30** is actuated by the driven lever **16**. Moreover, by increasing the size of the first catch **47** as opposed to reducing the size of the protrusion **45** to create the gap, the structural integrity of the pawl **30** may be increased. In other words, by increasing the size of the first catch **47** rather than decreasing the size of the protrusion **45**, the structural integrity of the protrusion **45** is not compromised.

FIG. **4b** shows the pawl assembly **21** in an intermediate position between the closed position of FIG. **4a** and the open position of FIG. **4c**. Specifically, the driven lever **16** (not shown in FIG. **4b**) rotates the pawl **30** in a counterclockwise direction so that the protrusion **45** moves beyond the first catch **47** and engages a second catch **46** of the latch **29**. The pawl **30** has a catch **44** that engages the driven lever **16**, which, when actuated, rotates that pawl **30** in a counterclockwise direction to move the pawl assembly **21** into an unlocked position, shown in FIG. **4c**.

FIG. **4c** shows the pawl assembly **21** in an open position where the strike **38** can be separated from the assembly, in other words, where the door can be opened. As shown in FIG. **4c**, the protrusion **45** has rotated beyond the second catch **46** and is engaging the surface **48** of the latch. Thus, when the pawl assembly **21** is in the open position shown in FIG. **4c**, the latch **29** is positioned to receive the strike **38**, e.g., when the door is closed. The force of closing the door drives the strike **38** into the strike slot **26a**, where the strike **38** pushes against the latch **29** and forces the latch **29** to rotate in the clockwise direction and against the force of the spring **28**. As the latch **29** is rotated, the spring **28** causes the pawl **30** to rotate in the clockwise direction, thus causing the protrusion **45** to rotate past the second catch **46** until the protrusion **45** is secured by the first catch **47**. Thus, as the door is closed, the strike **38** causes the pawl assembly **21** to move from the open position to the closed position, where the protrusion **45** of the pawl **30** engages the first catch **47** of the latch **29** to maintain the pawl assembly **21** in the closed position.

Lever Assembly

As mentioned above, the pawl assembly **21** is actuated by tab **74** within the lever assembly **100**, which is shown in an exploded view in FIGS. **5** and **11**. The lever assembly **100** includes a drive lever **18** and a driven lever **16**. The drive lever **18** and driven lever **16** are rotatably connected by the common pivot **57**, e.g., a pin that engages holes **50a**, **52** and **57a**. There is a bearing or washer **17a** between the head of the common pivot **57** and the drive lever **18**, and another bearing or washer **50** between the drive lever **18** and the driven lever **16**. The bearing **50** creates spacing between the drive lever **18** and the driven lever **16**, which reduces binding as the drive lever **18** and driven lever **16** rotate with respect to one another. Moreover, the drive lever **18** may have an offset surface **58** that extends toward the housing. The purpose of the offset surface is to provide stability to the lever assembly **100**. For example, in the context of FIG. **8**, is to reduce binding of the drive lever **18** with the housing **1**.

In the embodiment shown, the common pivot **57** is an internally threaded stud that receives a threaded screw **17** in order to secure the drive lever **18**, driven lever **16**, and bearings **50** on the common pivot **57**. In an alternative embodi-

ment, the common pivot 57 is a pin/press nut assembly that secures the drive lever 18, driven lever 16, and bearing 50 on the common pivot 57. The common pivot 57 also rotatably attaches the drive lever 18 and driven lever 16 to the pivot flange 32 that extends from the outer bracket 21. The pivot flange 32 may include a recess that receives the head of the common pivot 57 so that the head of the common pivot 57 does not extend below a bottom surface of the pivot flange 32. The pivot flange 32 and the common pivot 57 are contained within housing 1 and therefore do not penetrate the housing 1. This eliminates the need for a hole or opening in the housing 1 to accommodate the common pivot 57, which reduces the likelihood that water or other corrosive materials will penetrate the housing 1 and degrade the latch assembly 8.

The lever assembly 100 is actuated by the handle 5, e.g., when a user pulls the handle 5. As shown in FIG. 6, the handle 5 is operably connected to the lever assembly 100 by an axle 59 and a cam lever 20. More specifically, as shown in FIGS. 6 and 8 for example, the cam lever 20 engages a flange 68 of the drive lever 18. Thus, as the cam lever 20 is rotated, the cam lever 20 pushes against the flange 68 to rotate the drive lever 18 about the common pivot 57.

As shown in FIG. 6, the cam lever 20 is attached a collar 66 such that the cam lever 20 rotates about the axle 59. In other words, rotating the collar 66 causes the cam lever 20 to rotate. The collar 66 (and thus the cam lever 20) is rotated when the handle 5 is actuated, e.g., pulled. Specifically, the handle 5 has at least one faceted slot 57 that receives the collar 66. The collar 66 is fitted with at least one faceted surface 66a that corresponds to the faceted slot 67 in the handle 5. See, e.g., FIG. 7. Accordingly, when the handle is pulled, the facets of the slot 67 cooperate with the facets 66a to rotate the collar 66 and the cam lever 20. The slot 60a opposite the slot 67 may or may not be faceted as desired.

There is a flange 69 at one end of the axle 59 proximate the cam lever 20 to secure the axle 59 within the axle holes 60, 61 in the housing 1. The other end of the axle 59 may be secured using press nut 65 in combination with seals 64, 64a to prevent water or other material from penetrating the housing 1. Alternatively, the flange 69 or press nut 65 could be replaced with any fastener capable of securing the axle 59 within axle holes 60, 61.

As shown in FIG. 7, the cam lever 20 may be comprised of multiple pieces. In the embodiment shown, the cam lever 20 includes a separate collar 66 that is attached, e.g., via a press fit, to the main body of the cam lever 20. The collar 66 includes facets 66b that correspond to facets 20b in an aperture of the main body of the cam lever 20. These mating facets 66a, 66b and 20b prevent the main body of the cam lever 20 from rotating with respect to the collar 66, thus facilitating rotation of the cam lever 20 when the collar 66 is rotated. The collar 66 includes another facet 66a that corresponds to a facet in an aperture 67 in the handle 5 that receives the collar 66 and axle 59. Thus, when the handle 5 is rotated, the facets 66a and 67 cooperate to rotate the collar 66 and the axle 59. In order to prevent over-rotation of the cam lever 20, the cam lever 20 may include a stop 20a that extends from the cam lever 20. In an alternate embodiment, the cam lever 20 and collar 66 may be integral with one another. The collar 66 may further include a step to receive an o-ring.

The disclosed cam lever configuration is desirable to prevent water or other materials from infiltrating the inside of the latch assembly 8, which may cause corrosion and deterioration of the assembly over time. The cam lever 20 is positioned inwardly with respect to the handle 5 so that the cam lever 20 will be completely contained by the housing 1 of the latch assembly 8. In other words, the cam lever 20 does not extend

through the housing 1—it is contained completely on one side of the housing 1. This configuration eliminates the need for another hole in the housing 1, which reduces the likelihood that water or other corrosive materials might penetrate the housing 1 and degrade the latch assembly 8.

FIGS. 8-9a illustrate the interaction between the cam lever 20 and the drive lever 18. Specifically, FIGS. 8 and 9 show the latch assembly 8 in an unactuated position. The drive lever 18 is biased toward the cam lever 20 by a biasing element 19, e.g., spring 19. The spring 19 is attached to a flange 19a on the drive lever 18 at one end and to the outer bracket 31 of the pawl assembly 21 at the other end. Thus, the spring pulls the drive lever 18 against the cam lever 20.

As shown in FIG. 9, the spring is parallel to the wall of the pawl assembly 21 to which it is attached. Therefore, in the context of FIG. 9, when the drive lever 18 is actuated by the cam lever 20, the spring 19 is stretched straight downwardly (or vertically) along an axis that is tangent to an arc along which the drive lever 18 moves. In other words, the spring 19 lies along an axis that is parallel to the plane through with the cam lever 20 moves. Accordingly, there is no wasted energy along a horizontal vector (in the context of FIG. 9) because the spring 19 is being pulled only in the vertical direction. One way to achieve this is by attaching the spring 19 to the pawl assembly 21 at a point that is inward of the cam lever 20 with respect to the outer perimeter of the housing 1. Alternatively, the spring 19 could be positioned so that it is outward of the cam lever 20 with respect to the outer perimeter of the housing 1. Still further, where the spring 19 is positioned in the same plane as the cam lever 20, i.e., in the plane through which the cam lever 20 rotates, the spring 19 can be positioned above the cam lever 20 (in the context of FIG. 8) so that the spring 19 does not interfere with the movement of the cam lever 20. Otherwise, the spring 19 would have to be angled with respect to the plane through which the cam lever 20 moves, which is undesirable.

When the handle 5 is pulled downwardly (in the context of FIG. 8a), the axle 59 and cam lever 20 is rotated in a counterclockwise direction, thus causing the cam lever 20 to push against the flange 68 of the driven lever 18, and against the force of the spring 19. As shown in FIG. 9a, the protrusion 13a is in the first position, thus engaging the driven lever 16 with the drive lever 18. Accordingly, as the drive lever 18 is rotated in a clockwise direction (in the context of FIG. 9a), the drive lever 18, via the protrusion 13a, causes the driven lever 16 to rotate in a clockwise direction. This causes the driven lever 16 to actuate the pawl assembly 21 by rotating the pawl 30. The interaction of between the driven lever 16 and the pawl assembly 21 is shown in FIG. 10 (where the inner bracket 22 has been removed for clarity) and FIG. 11.

Conversely, when the protrusion 13a was in the closed position, e.g., toward the bottom of the slot in the drive lever 18 (in the context of FIG. 12), the drive lever 18 does not engage the driven lever 16, thus preventing actuation of the pawl assembly 21. See FIG. 12. In other words, the user would pull the handle 5 to actuate the drive lever 18, but the pawl assembly 21 would not be actuated and would therefore not release the strike 38.

As shown in FIG. 2, the end of the slot 18b of the drive lever 18 is angled with respect to the body of the drive lever 18. In the embodiment shown, the end of the slot 18b is substantially perpendicular with respect to the drive lever 18. The angled nature of the end of the slot 18b enables the removal of the rod 14 and protrusion 13a without the need to disassemble the lever assembly 100. Accordingly, the lock assembly 7 may be exchanged or replaced without disturbing the other assemblies included in the latch assembly 8.

Various alternatives and modifications are contemplated as being within the scope of the following claims particularly pointing out and distinctly claiming the subject matter regarded as the invention.

I claim:

1. A latch assembly comprising:
 - a pawl assembly having an open position and a closed position;
 - a lever assembly that actuates the pawl assembly from the closed position to the open position, the lever assembly comprising:
 - a drive lever having a slot; and
 - a driven lever having a slot that is open on one end;
 - a lock assembly having an engagement member that moves along the slot of the drive lever between an engaged position where the engagement member is received within the slot of the driven lever and a disengaged position where the engagement member is outside of the slot of the driven lever;
 - a cam lever that actuates the drive lever; and
 - a biasing element that biases the drive lever toward the cam lever, wherein the biasing element is aligned with an axis that is substantially parallel to a plane through which the cam lever moves.
2. The latch assembly of claim 1, wherein the open end of the slot in the driven lever is wider than a closed end of the slot in the driven lever.
3. The latch assembly of claim 2, wherein the slot in the driven lever has a pair of beveled edges at the open end of the slot.
4. The latch assembly of claim 1, wherein the lock assembly further comprises a linkage and a lock actuator, and wherein the engagement member is moved between the engaged position and the disengaged position by rotating the lock actuator.
5. The latch assembly of claim 4, wherein the lock actuator is a cylinder that receives a key.
6. The latch assembly of claim 1, further comprising:
 - a housing that supports the pawl assembly, the lever assembly and the lock assembly;
 - a cam lever that actuates the drive lever, wherein the cam lever is positioned on one side of the housing and does not extend through the housing; and
 - a biasing element that biases the drive lever toward the cam lever.
7. The latch assembly of claim 1, wherein the biasing element is aligned with an axis that is substantially parallel to a plane through which the cam lever moves.
8. The latch assembly of claim 1, wherein the slot of the drive lever is nonplanar.
9. The latch assembly of claim 1, wherein a first part of the slot of the drive lever lies in a first plane and a second part of the slot of the drive lever lies in a second plane that is substantially perpendicular to the first plane.
10. The latch assembly of claim 1, wherein the lock assembly is removable from the latch assembly without disassembly of the lever assembly.

11. A latch assembly comprising:
 - a housing; and
 - a lever assembly supported by the housing, the lever assembly comprising
 - a drive lever having a slot;
 - a driven lever having a slot, wherein the drive lever drives the driven lever when an engagement member is positioned within the slot of the driven lever; and
 - a cam lever that actuates the drive lever, wherein the cam lever is positioned on one side of the housing and does not extend through the housing.
12. The latch assembly of claim 11, wherein the drive lever is biased toward the cam lever by a biasing element that is aligned along an axis that is substantially parallel to a plane through which the cam lever moves.
13. The latch assembly of claim 11, wherein the slot of the driven lever is open on one end.
14. The latch assembly of claim 11, wherein the engagement member is movable between a first position where the engagement member is received within the slot of the driven lever and a second position where the engagement member is outside the slot of the driven lever.
15. The latch assembly of claim 14, wherein a lock assembly causes the engagement member to move between the first position and the second position.
16. The latch assembly of claim 15, wherein the lock assembly is removable from the latch assembly without disassembly of the lever assembly.
17. The latch assembly of claim 11, wherein an end of the slot in the drive lever is angled with respect to the remainder of the drive lever.
18. The latch assembly of claim 17, wherein the engagement member may be removed from the slot of the drive lever without disassembly of the lever assembly.
19. A latch assembly comprising:
 - a housing;
 - a handle that is rotatably attached to the housing by an axle;
 - a pawl assembly supported by the housing, the pawl assembly having an open position and a closed position;
 - a lever assembly that actuates the pawl assembly from the closed position to the open position, the lever assembly being supported by the housing and comprising:
 - a drive lever having a slot;
 - a driven lever having a slot that is open on one end; and
 - a cam lever that actuates the drive lever, the cam lever being secured to the axle so that rotation of the axle causes the cam lever to rotate;
 - wherein the cam lever is positioned on one side of the housing and does not extend through the housing;
 - a lock assembly having an engagement member that moves along the slot of the drive lever between an engaged position where the engagement member is received within the slot of the driven lever and a disengaged position where the engagement member is outside of the slot of the driven lever;
 - wherein the drive lever drives the driven lever only when the engagement member is in the engaged position.

* * * * *